

Think GAIA  
For Life and the Earth

**SANYO**

4 Megapixels Full HD Network  
10x AF Zoom Camera

VCC-HD4000P

1080p FULL  
**HD**  
NETWORK CAMERA



**DAY NIGHT**

**FULL HD**  
1920 x 1080

# 1080p Full HD, 25 IPS with High-Quality Images



## 4 Megapixels resolution

Compared to conventional VGA cameras having a 640 x 480 pixel resolution, the 4 megapixels (2288 x 1712) CMOS newly employed in the SANYO VCC-HD4000P achieves a resolution approximately 9 times that of a conventional camera. This makes it possible to cover 9 times the monitoring area, the image quality being the same. In addition, image capture of detailed parts are clearer when these images are enlarged, provided shooting angles are the same.



Because of the higher quality of recorded images, areas that conventional cameras with a smaller pixel count cannot cover or confirm can be identified (if stored as local data).

## Progressive scan CMOS sensor for image clarity

Most sensors utilize the interlace system which tends to make moving images jagged or blurred due to processing time differences. The VCC-HD4000P is equipped with a progressive scan system that ensures clear, smooth images are output.



Interlace image



Progressive image

## No focus adjustment required for built-in 10x AF zoom lens

The VCC-HD4000P also incorporates a high-performance, high-resolution optical 10x AF lens that is Full HD compatible. Intensive focusing becomes unnecessary as the camera has been pre-optimized for best performance under actual use conditions, allowing highly detailed, sharp target capture. In addition, a separate digital 16x zoom-in function, along with the optical 10x zoom, can zoom up to 160x (max.).



10x AF zoom lens

## Dual Codec for Full HD with H.264 / 2288 x 1712 with JPEG

The VCC-HD4000P achieves 1080p (Full HD) 25 IPS with the H.264 high-performance compression codec optimized for network transmission. It also has a fine JPEG format resolution of 2288 x 1712 pixels. Monitoring can be conducted simultaneously in H.264 and JPEG formats by minimizing network traffic.

• H.264 ActiveX Plug-in required (bundled).

## HD image recording on SD memory card or external 2.5" HDD

The VCC-HD4000P is equipped with an SD card slot for saving HD images to an SD memory card. If an external HDD is connected, important data can be stored over a longer period and in more quantity without having to use a PC. The camera is designed to ensure the integrity of stored data.

SD Memory Card  
(sold separately)



SD Card Slot



- SD memory cards and 2.5" hard disk drives are separately sold. HDD requires a dedicated case (separately sold).
- The HDD can also be installed above the main unit.



# More clear, Easier to use



### Human face detection

The VCC-HD4000P evaluates portions of human faces in order to automatically detect human faces. The AF function activates when human faces are detected. In addition, for images backlit by the sun, appropriate Backlight Compensation is performed. This unit is capable of detecting up to 32 human faces (max.).

#### Detects faces and applies optimum focus compensation



Before detection



After detection

#### Detects faces and applies optimum backlight compensation



Before detection




After detection

### Clipping Function

When image data is output on a conventional SD output (composite) terminal, up to 4 VGA-sized sections (max.) of the displayed image can be selected, clipped and continuously monitored in sequence.



Clipping Function image



HD monitor

### Equipped with HDMI terminal

An HD monitor connects to the VCC-HD4000P with a single HDMI cable, allowing non-compressed digital images to be transferred without any loss of image quality.



HDMI cable



### Privacy Masking

Addressing privacy issues, 5 masks (max.) are available for designated areas to prevent unauthorized display of anything that involves privacy on the display screen. Masking patterns are easily set with drag and drop.



Privacy Masking image

### Smearless

The detection function offers two different advantages: Conventional CCD units are known to generate vertical noise (smears) associated with bright spots. The new sensor diminishes these smears and offers a clear and bright picture.



Conventional cameras



VCC-HD4000P

### True Day/Night



A color camera, which captures objects in vivid colors in daylight, becomes a high-sensitivity B/W camera during the night and provides tiny details even in dark corners. A day/night camera is a two-in-one solution.

### Alteration Detection

VCC-HD4000P verifies by itself whether or not an electronic alteration was made to original images.

### Cable cover

System expandability has been designed into the versatile VCC-HD4000P which incorporates connections for HDTV, LAN, HDD, among others. The rear panel has a cover for neat storage of external connection cables.



### Recording time collation table based on the memory capacity and recording conditions

| Codec | Resolution  | Picture Quality | Recording Rate (max.) | Bit Rate (approx.) | Capacity for 1 hr. rec |
|-------|-------------|-----------------|-----------------------|--------------------|------------------------|
| H.264 | 1920 x 1080 | SuperFine       | 25 ips                | 8.0Mbps            | 5.6GB                  |
|       | 1280 x 720  | SuperFine       | 25 ips                | 6.6Mbps            | 4.7GB                  |
|       | 640 x 360   | SuperFine       | 25 ips                | 1.8Mbps            | 1.5GB                  |
|       | 1920 x 1080 | Basic           | 25 ips                | 4.0Mbps            | 2.9GB                  |
|       | 1280 x 720  | Basic           | 25 ips                | 2.5Mbps            | 2.0GB                  |
|       | 640 x 360   | Basic           | 25 ips                | 0.55Mbps           | 0.64GB                 |
| JPEG  | 2288 x 1712 | SuperFine       | 2.5 ips               | 13.0Mbps           | 5.0GB                  |
|       | 1920 x 1080 | SuperFine       | 5 ips                 | 12.4Mbps           | 5.7GB                  |
|       | 640 x 360   | SuperFine       | 25 ips                | 11.2Mbps           | 5.2GB                  |
|       | 2288 x 1712 | Basic           | 3 ips                 | 4.8Mbps            | 2.1GB                  |
|       | 1920 x 1080 | Basic           | 5 ips                 | 5.4Mbps            | 2.7GB                  |
|       | 640 x 360   | Basic           | 25 ips                | 4.0Mbps            | 2.1GB                  |


\*Bit rate and 1 hr. rec data are approximate.

# Advanced Network Solution




## Transmission using 2 types of codecs (H.264 and JPEG) is possible.

For video compression, H.264, optimized for transmission of moving images over a network with low bit transfer rates, is used to enable real-time high image quality monitoring, and for still images JPEG is used to offer high image quality in a common image format. Monitoring can be performed according to the user's application, so that any important scene is not missed.

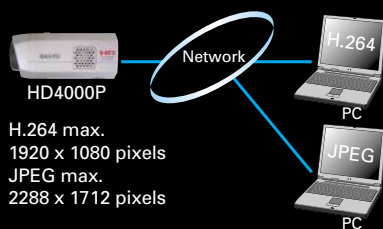

## PC for Monitoring

By simply using Internet Explorer (ver. 6.0 or higher) on a personal computer, the user has access to full color video images from the camera. Saving JPEG images on a PC is also possible by using VA-SW3050S server software.

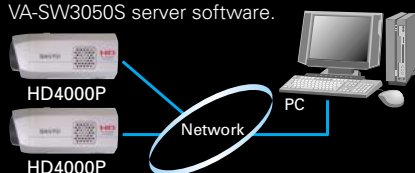

## Not impacted by network problems

Automatically restarts network image data transmission after a network problems is resolved.

## Alarm Buffering Function

This function saves the video images recorded during an alarm recording internally or to an SD memory card before streaming them. This prevents the loss of the image data even if image transmission delay occurs due to bandwidth limitations or network traffic conditions.


## Other Features

- Power-over-Ethernet (PoE)
- Multi-cast
- Backup for interruption of network recording
- Internal log files: up to 100 access Logs & up to 200 system information
- E-mail function
- SSL-compatible (JPEG only)

## HDC Downloader (bundled)

Video data recorded on an SD memory card or HDD can be downloaded to a PC.

- Select JPEG or H.264
- Search for video data to be downloaded by data and time
- Connect SD or HDD to PC directly to copy video data



## DL Viewer (bundled)

This is used to play back downloaded video or recorded data on SD or HDD.

- JPEG or H.264 can be play back.
- Images can be saved and printed.



## Network recording software VA-SW3050S (for server) / VA-SW3050C (for client)

The VCC-HD4000P is bundled with VA-SW3050LITE viewer software allowing live video streams sent from cameras to be monitored on a PC.

The network recording software VA-SW3050S / VA-SW3050C (sold separately) is an application program that extends the network operation of the camera. By installing this software, it is possible to monitor images from multiple cameras on a split screen and access and operate up to 128 cameras over a network. VA-SW3050S further offers the convenience of recording live images and alarm/timer functions. It is an exclusive software package for the VCC-HD4000P.

Live images from a single camera can be viewed on a PC using Internet Explorer\* (ver. 6.0 or higher). To view live images from multiple cameras, install the included VA-SW3050LITE viewer software.

\* ActiveX installation is required.



Main window (Internet Explorer)



16-screen display (VA-SW3050LITE / VA-SW3050C)

## Feature Comparison

|   | Internet Explorer <sup>*1</sup> | Bundled<br>VA-SW3050LITE | Sold separately<br>VA-SW3050S | VA-SW3050C |
|---|---------------------------------|--------------------------|-------------------------------|------------|
| Number of cameras supported             | 1                               | Max. 128                 |                               |            |
| Live monitor                            | ✓                               | ✓                        | —                             | ✓          |
| Camera control                          | ✓                               | ✓                        | —                             | ✓          |
| Video recording                         | —                               | —                        | ✓ (JPEG only)                 | —          |
| Playback                                | —                               | —                        | —                             | ✓          |
| Video search                            | —                               | —                        | —                             | ✓          |
| Download/Print                          | —                               | — / ✓                    | —                             | ✓ / ✓      |
| Network setting on the camera main unit | ✓                               | —                        | —                             | —          |

## System Requirements

|                   | Internet Explorer <sup>*1</sup>  | VA-SW3050LITE   | VA-SW3050S                    | VA-SW3050C  |
|-------------------|--|---|-------------------------------|---|
| PC                | IBM PC/AT and compatibles  |   |                               |   |
| OS                | Windows® XP Professional SP2, Windows® Vista, Windows Server 2003 SP2 (SW3050S only) |   |                               |   |
| CPU               | Core2Duo E6700, 2.66 GHz or higher   | Core2Duo E6700, 2.66 GHz or higher <sup>*1</sup>  | Pentium IV, 3.0 GHz or higher | Core2Duo E6700, 2.66 GHz or higher <sup>*1</sup>      |
| Memory            | 1 GB (Windows® XP), 2 GB (Windows® Vista)  | 1GB (Windows® XP), 2GB (Windows® Vista) <sup>*2</sup>   | 1 GB or more                  | 1GB (Windows® XP), 2GB (Windows® Vista) <sup>*2</sup> |
| Network interface | 100Base-TX   |   |                               |   |
| Display card      | 1920 x 1200 pixels or higher   | 1024 x 768 pixels or higher, 16 million colors or higher  |                               |   |
| Graphics chip     | HD (HDMI)  | ATI: RADEON HD2600 series or higher<br>nVIDIA: GeForce 8600 series or higher, Quadro FX550 series or higher |                               |   |
|                   | SD (composite)   | ATI: RADEON X1000 series or higher<br>nVIDIA: GeForce 6000 series or higher, Quadro4 series or higher       |                               |   |
| Voice             | —  | Sound card with 100% DirectX compatibility and speakers <sup>*4</sup>                                       |                               |   |

<sup>\*1</sup> Ver. 6.0 or higher <sup>\*2</sup> When the number of cameras connected is 4 or fewer <sup>\*3</sup> When the number of cameras connected is between 5 and 16 <sup>\*4</sup> The camera main unit is not equipped with audio functions.

## SANYO Software Development Kits (SDK)

SANYO now offers two types of SDKs to help the user develop applications suitable for particular needs or for more compatibility with network devices and software from different vendors.

\*For further information of the SDK, please contact the nearest SANYO representative.

## Note:

Depending on your computer's performance or network environment, the system may enter the busy state if the PC is connected to many H.264 video channels. If a warning message appears in the dialog box, decrease the number of the connected H.264 video channels.



# Six reasons for recommending the VCC-HD4000P

- (1) Since the number of pixels is approximately 9 times that of a conventional camera (VGA), it will cover 9 times the monitoring area, the image quality being the same.
- (2) Zooming the display during playback offers higher quality with clearer print output.
- (3) Costs less. The number of cameras used can be fewer because a high pixel count camera can cover a more expanded area. In addition, costs for camera main unit, cables, housing and installation can also be reduced.
- (4) Also compatible with PoE, which does not require power-supply installations. Simply inserting a LAN/ethernet connector allows extension.
- (5) Built-in zoom lens incorporates AF so that additional lens purchases are not required while installation and set-up are simple.
- (6) Also equipped with an optical zoom lens.


## Application: BANKS

### Applications/Advantages:

- Monitoring and assured recording of fraudulent acts on premises
- 24/7 operations for crime prevention systems coordinated by monitoring centers
- Contributes to improved service and enhanced levels of customer confidence
- Applicable to staff training and customer service improvement
- Flexible expandability to cope with future change and expansion




### Local recording/alarm terminal synchronization

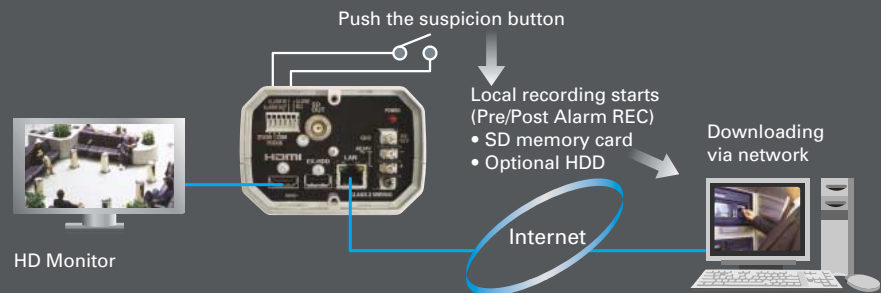

## Application: SMALL STORES

### Applications/Advantages:

- Low-cost setup of a high-performance, easy-to-operate surveillance system
- Readiness against trouble and incident, deterrent to illicit behavior
- Reduced inventory loss due to product damage and theft
- Verification of customer traffic flows for effective product displays
- Improvement of in-store staff conduct and attitude

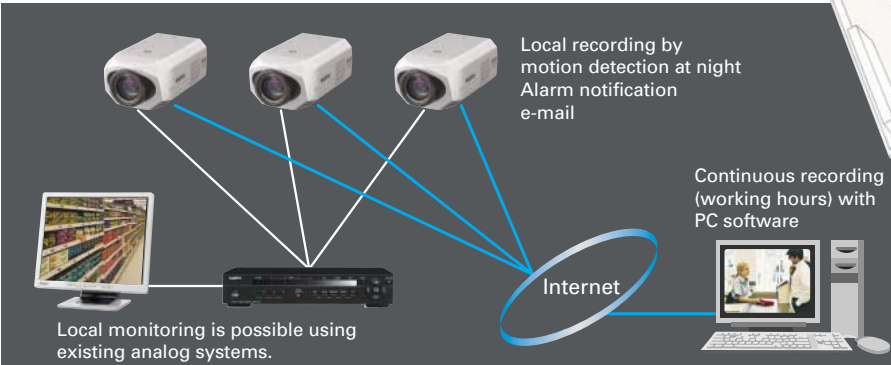

## Examples of System Introduced



Bank



Parking



Traffic control center



Casino





Factory

## Specifications

| Model No.                  | VCC-HD4000P   |   |
|----------------------------|---|---|
| Lens                       |   |   |
| Image sensor               | 1/2.5" CMOS sensor  |   |
| Effective picture elements | 2320 (H) x 1728 (V) approx. 4 Megapixels  |   |
| Recording picture elements | 2288 (H) x 1712 (V) approx. 3.92 Megapixels   |   |
| Lens                       | Focal length: f=6.3 – 63.0mm (Optical 10x)  |   |
|                            | F number: F1.8 – 2.5  |   |
|                            | Digital zoom: 16x   |   |
| CAMERA                     |   |   |
| Image size                 | H.264   | 16:9 HD 1920 x 1080p 25ips<br>HD 1280 x 720p 25ips, 960 x 540P 25ips, 640 x 360p 25ips, 320 x 180p 25ips<br>4:3 1080 x 864p, 720 x 576p 25ips, 360 x 288p 25ips |
|                            | JPEG  | 16:9 HD 1920 x 1080, HD 1280 x 720, 1024 x 576, 640 x 360<br>4:3 4M 2288 x 1712, 2M 1600 x 1200, 1280 x 960, 1024 x 768, 800 x 600, 640 x 480, 320 x 240        |
| Synchronizing system       | Internal synchronization  |   |
| Minimum illumination       | 2 lx (F1.8, color, gain: High, VGA)<br>0.1 lx (F1.8, b/w, gain: High, VGA)  |   |
| Video S/N ratio            | 50dB (AGC OFF)  |   |
| Day/Night                  | Auto/Color/Black and White  |   |
| Auto focus                 | AUTO/MANUAL/ONE-PUSH; Selectable focus area   |   |
| White balance              | ATW/AWC/MWB/Outdoor/Indoor/Fluorescent<br>Adjustable R and B signals in MWB mode  |   |
| Backlight compensation     | Multi-spot metering/Center-zone metering/Face/OFF, Mask settings possible   |   |
| Electronic shutter         | 1/25, 1/50, 1/120, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000<br>LONG shutter: x1, x2, x4, x8, x16, x32  |   |
| Iris control               | AUTO/MANUAL, Selectable electronic shutter in manual mode   |   |
| AGC                        | Normal/Middle/High/Off, Adjustable gain control in Off mode   |   |
| Gamma                      | 0.45/1, other settings available  |   |
| Aperture compensation      | ON/OFF  |   |
| Electronic sensitive boost | AUTO/OFF, Max. 32x  |   |
| Privacy masking            | ON/OFF, Max. 5 masks  |   |
| Motion detector            | ON/OFF, Selectable area detection, Selectable sensitivity level, Human face detection<br>Motion alarm zoom function: Selectable magnified ratio and duration time<br>*Available in preset positions |   |
| Menu language              | English/Spanish/German/French/Japanese  |   |
| Camera title               | 16 characters   |   |
| Recording and Playback     |   |   |
| Image quality              | Selectable  |   |
| Recording rate             | Selectable  |   |
| Recording mode             | Alarm recording (Pre/Post setting, Selectable recording rate)<br>Suspicion recording (Selectable recording rate), Timer recording   |   |
| Input/Output               |   |   |
| SD card slot               | 1 (SDHC supported)  |   |
| USB port                   | Supported HDD   |   |
| Video output               | HD output HDMI port<br>SD output composite (BNC terminal, PAL)  |   |
| Network                    | RJ-45 port (10BASE-T/100BASE-TX/1000BASE-T)   |   |
| Alarm input                | 2 (NO/NC setting. This output is also used for day/night control of color, B/W and auto mode)   |   |
| Alarm output               | 1 (Selectable NO/NC; open collector)  |   |
| External lens control      | Zoom/Focus/Common (Voltage control: $\pm 6 - \pm 12V$ )   |   |
| Operation button           | SET button and Cursor buttons (These are used for MENU and Zoom/Focus)  |   |
| Network                    |   |   |
| Image compression          | H.264/JPEG  |   |
| Picture quality            | Selectable  |   |
| Bandwidth                  | No limitation and selectable bandwidth limitation   |   |
| Interface                  | 10BASE-T/100BASE-TX/1000BASE-T (PoE compatible)   |   |
| Protocols                  | TCP/IP, UDP, HTTP, HTTPS, SMTP, NTP, DHCP, FTP, UPnP, DDNS  |   |
| Simultaneous access        | Max. 16   |   |
| Security                   | BASIC authentication (ID/password)<br>SSL supported (JPEG only)   |   |
| Others                     |   |   |
| Environmental conditions   | -10°C to 50°C / Less than 90% RH  |   |
| Power supply               | 24V AC $\pm 10\%$ , 50 Hz or 12 V to 15 V DC  |   |
| Power consumption          | 12.3 W  |   |
| Dimensions                 | 95 (W) x 67 (H) x 159 (D) mm  |   |
| Weight                     | 710g (25.0 oz.)   |   |

## Dimensions

Unit: mm (inch)

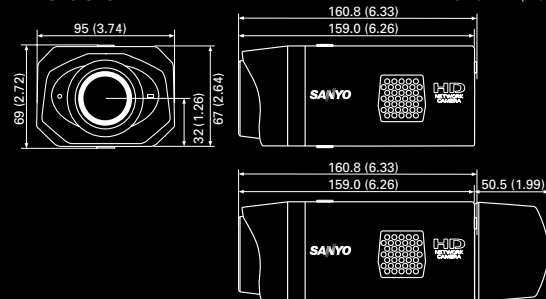

Rear panel



Side panel

- ① Control terminals
- ② SD Output (Composite)
- ③ Power indicator
- ④ Power connection terminals (24V AC, 12V DC, GND)
- ⑤ LAN I/F (RJ45)
- ⑥ USB I/F (EX-HDD only)
- ⑦ HD Output (HDMI)

- ⑧ SD Memory Card slot
- ⑨ Operation buttons

## Optional Accessories (sold separately)



**Network Recorder**  
**VA-SW3050S** for server PC  
**VA-SW3050C** for client PCs



**Hard Disk Case**  
**VA-HDC4000**



**Wide Conversion Lens**  
**VCP-L07W**

## SD Memory Card\*

## 2.5" HDD (Hard Disk Drive)\*

\*For more details, visit [www.sanyosecurity.com](http://www.sanyosecurity.com)

HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the U.S. and other countries. All other trademarks are the property of their respective owners.

### Notes:

- Frame rates are variable dependent upon network line conditions and PC performance.
- Because products and software described in this brochure are subject to continuous improvement; SANYO reserves the right to modify product specifications, functions and design without notice.
- Screen images are simulated.
- Comparative images are representations only.
- If a 2.5" HDD is used, a dedicated case (sold separately) is required.

**Caution:** Please consult the instruction manual to ensure safe and proper operation of the product.



Digital System Company of SANYO Electric Co., Ltd. obtained Quality Management System ISO 9001 and Environmental Management System ISO 14001 certifications.

Distributed by:



**SANYO Electric Co., Ltd.**  
**Digital System Company**  
<http://www.sanyosecurity.com>

©2008 SANYO Printed in Japan 2008.9 MA  
**SFA191F**